


6002 LIVEWELL CONTROL CENTER HOOK UP DIAGRAM

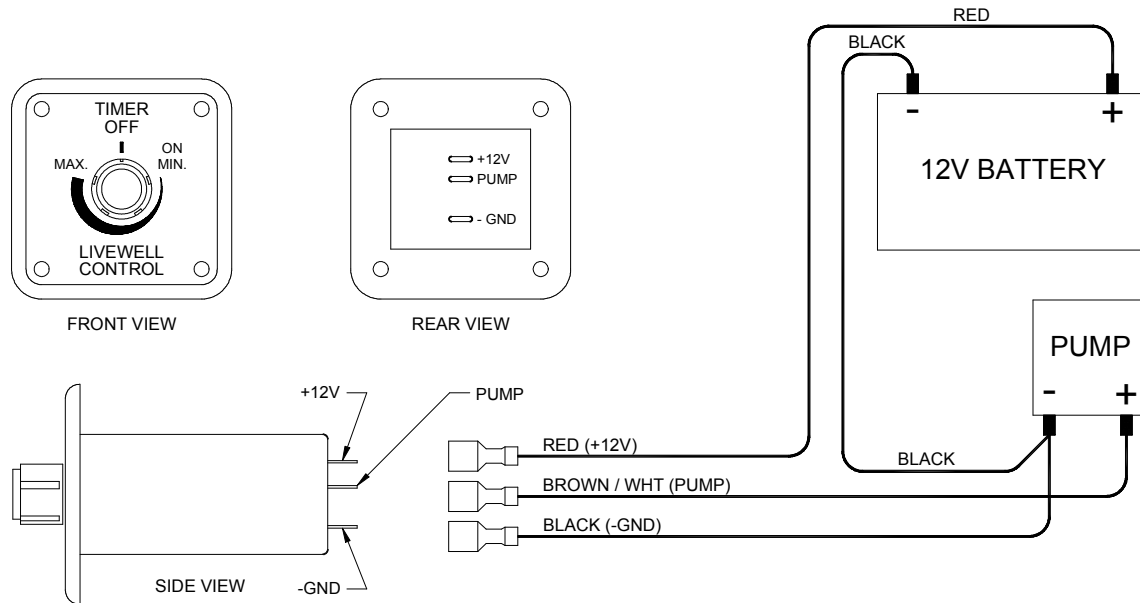

Installation

Select a location for mounting the Control Panel, cut a hole 1-7/8" x 1-5/8" (see sheet 2), secure panel with #8 sheet metal screws. After mounting panel, string wire to battery and pump areas. The **RED** wire connects to the Battery (+) positive, the **BLACK** wire connects to the Pump (-) negative, the **BROWN/WHITE** wire connects to the Pump (+) positive. Using wiring diagram above, attach wiring to your boats electrical system.

Operation

To operate your **LIVEWELL CONTROL**, turn the knob to the **ON MIN.** position. You can adjust the **OFF** cycle from approximately **90** (min.) seconds to approximately **5** (max.) minutes by rotating the time control knob. The **ON** cycle approximately **30** seconds is **NOT** adjustable.


CONNECT TO 12 VOLTS ONLY!

NOT TO BE USED ON PUMPS DRAWING MORE THAN 8 AMPS.

MARLAN INDUSTRIES

2631 Myrtle Springs Ave
Dallas, TX 75220

PH: 214-357-6571 or 888-358-8122 FX: 214-902-8548

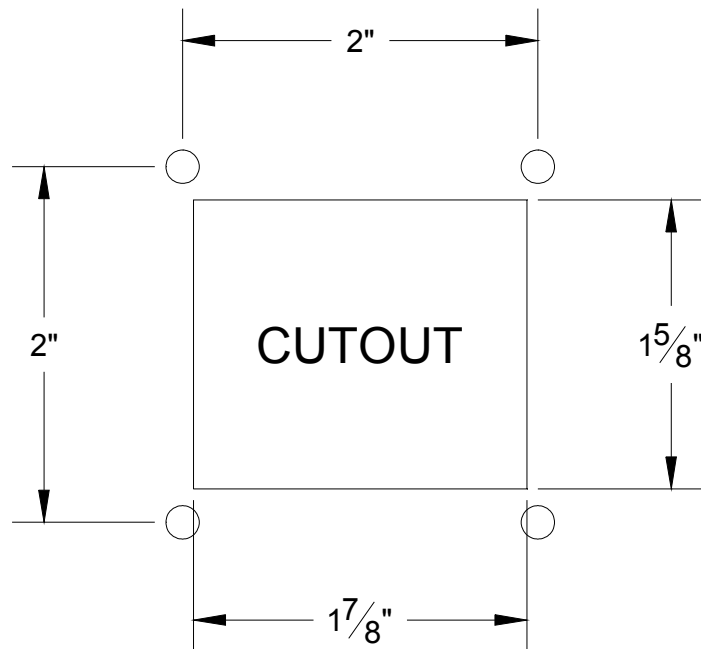

NOT TO SCALE
FOR REFERENCE ONLY



Control Panels * Custom Insert Molding * Electrical Parts * Wire Harnesses
Email: info@marlanindustries.com Web page: www.marlanindustries.com